




科海光器件

# DIN ADAPTER

---

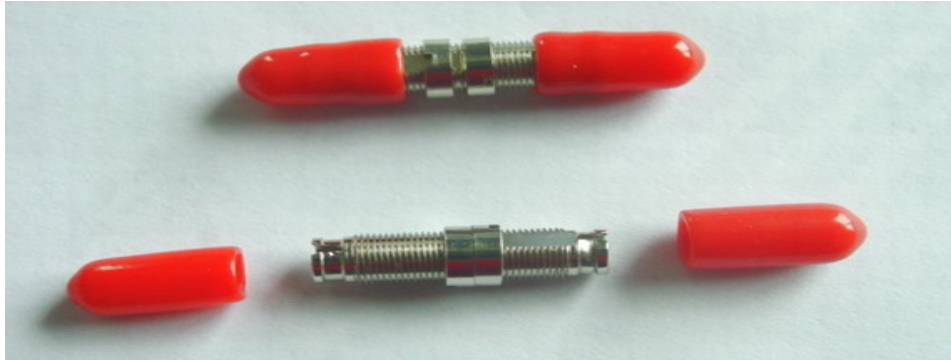

---

## APPLICATIONS

-CATV  
-Metro  
-Test equipment

-Active device termination  
-Local Area Networks (LANs)  
-Premise installations

-Telecommunication networks  
-Data processing networks  
-Wide Area Networks (WANs)

## SPECIFICATIONS

Insertion Loss	<0.20dB
Durability	<0.20 dB typical change, 1000 matings
Operating Temperature	-40 to + 85°C

---

Yingtian kehai optic component co., ltd.      Address: Yingtian City Industrial Park ,Jiangxi P.R.C

Post cord:335000    Tel: +086-0701-6317506    Fax: +086-0701-6317508

<http://www.kh-optic.com>    E-mail: ytqff@163.com